


How to connect MSD to HOG


MSD requires a piece of software from HOG to be able to receive DMX values from a HOG console. This software is called the 'Visualizer Connectivity Driver'. This can be downloaded from the HIGH END / HOG web-site (www.highend.com). Also make sure that the 'HOG Network Link' is installed as a DMX Connection in MSD.

Steps to take on the MSD Visualizer

- Start the Visualizer
- Open the **External DMX Connection** selection dialog

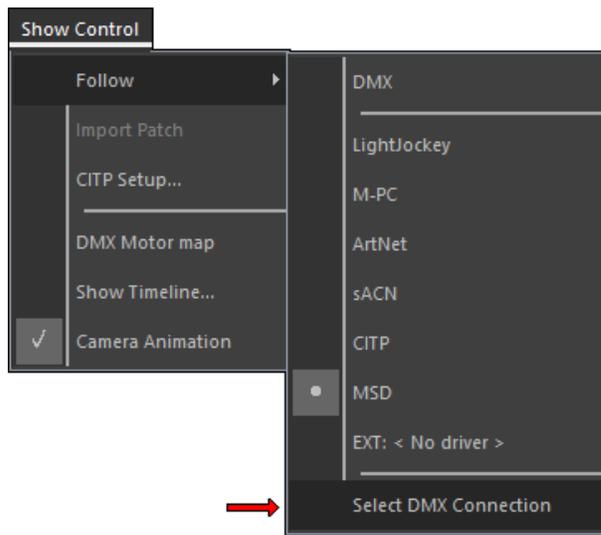


- Select the **HOG Network Link** DMX Driver:

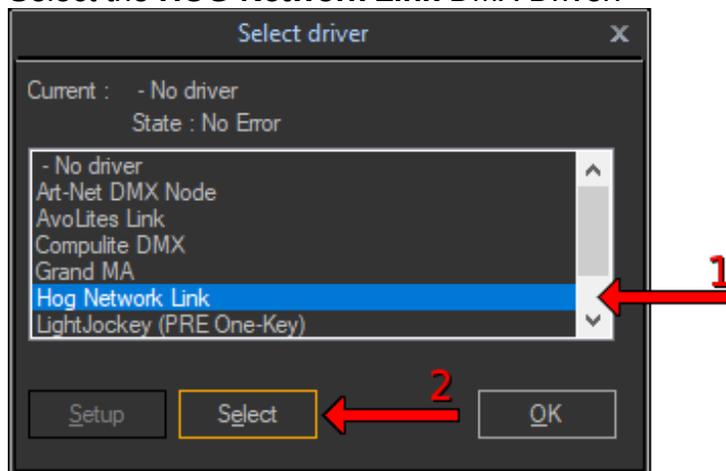


- If you are going to setup the HOG next, then keep the Visualizer running.

Steps to take on the HOG

- Start the HOG.
- Before loading a show, go to **Control Panel**:

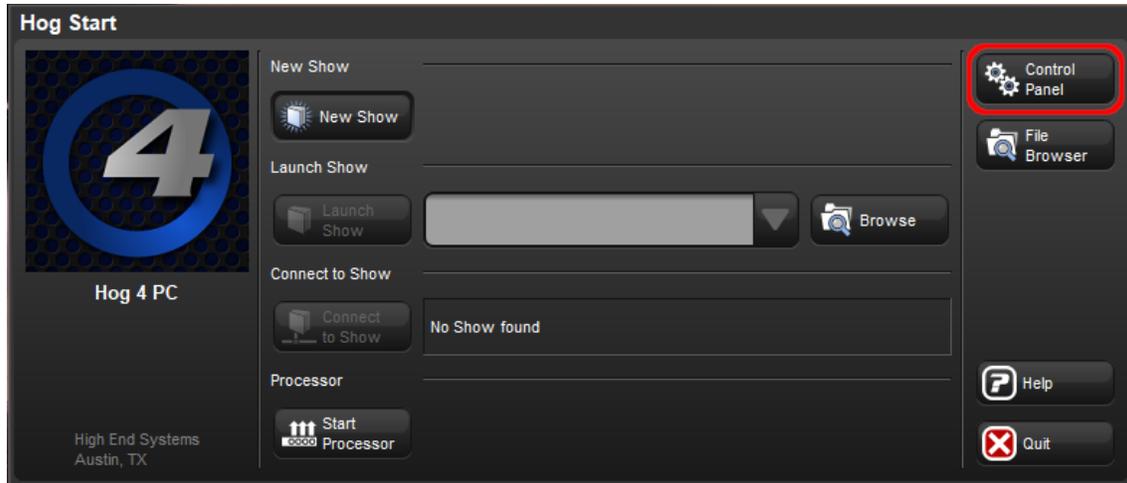

- In the **Control Panel**, select the **Startup** tab and make sure the **Run Visualizer Stream** is turned on:

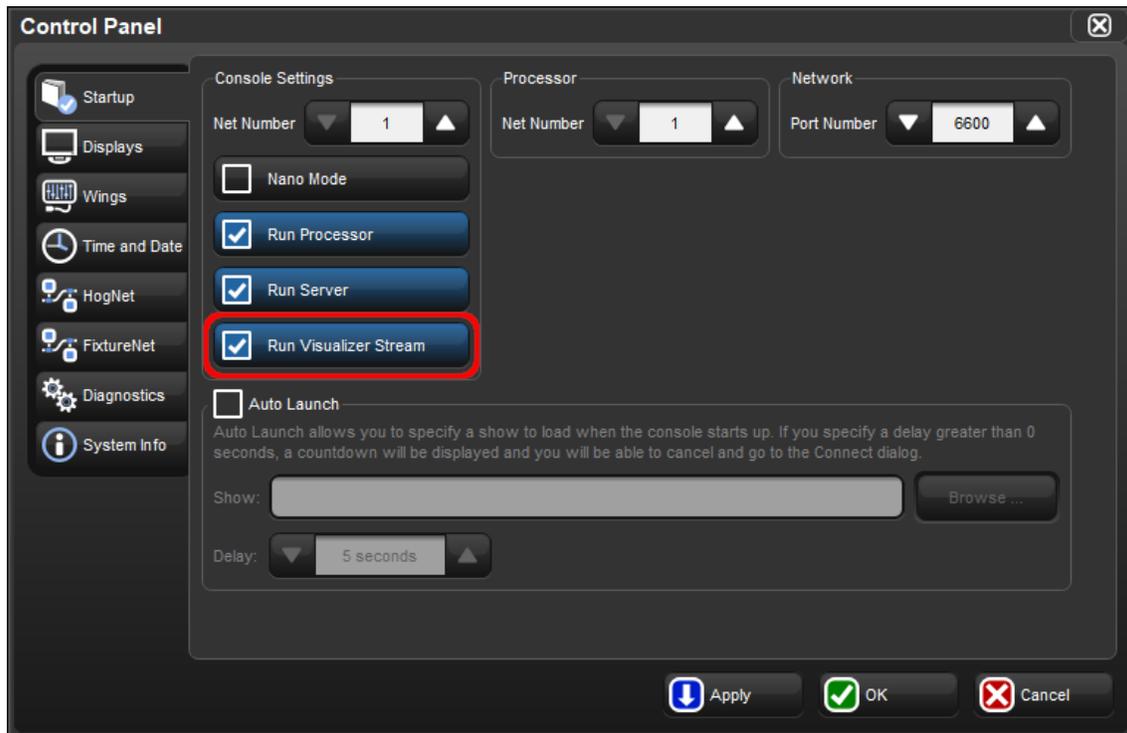


- Apply and close the Control Panel
- Load the show


- Click on **Setup**:




- Open the **Network** overview:

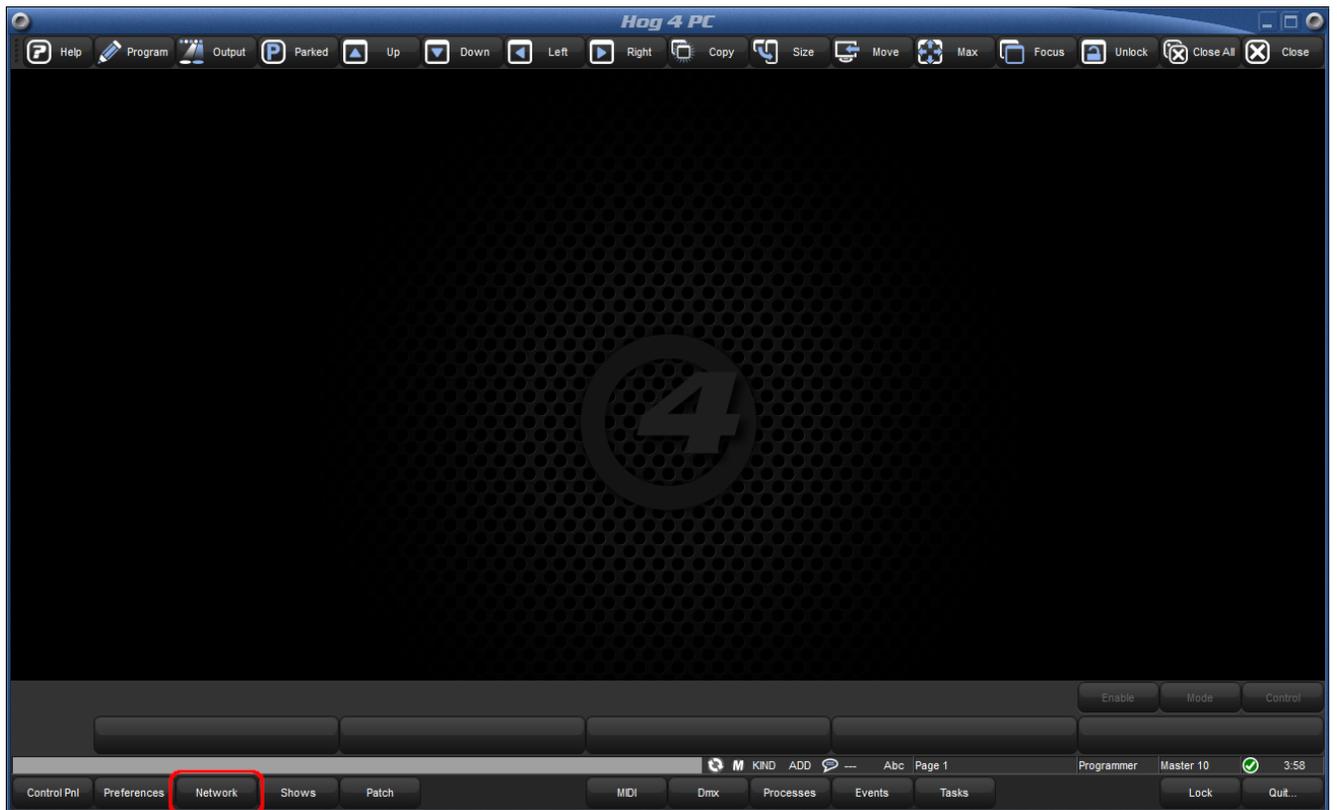

- Select the **Visualizer** node and open the **Settings**:

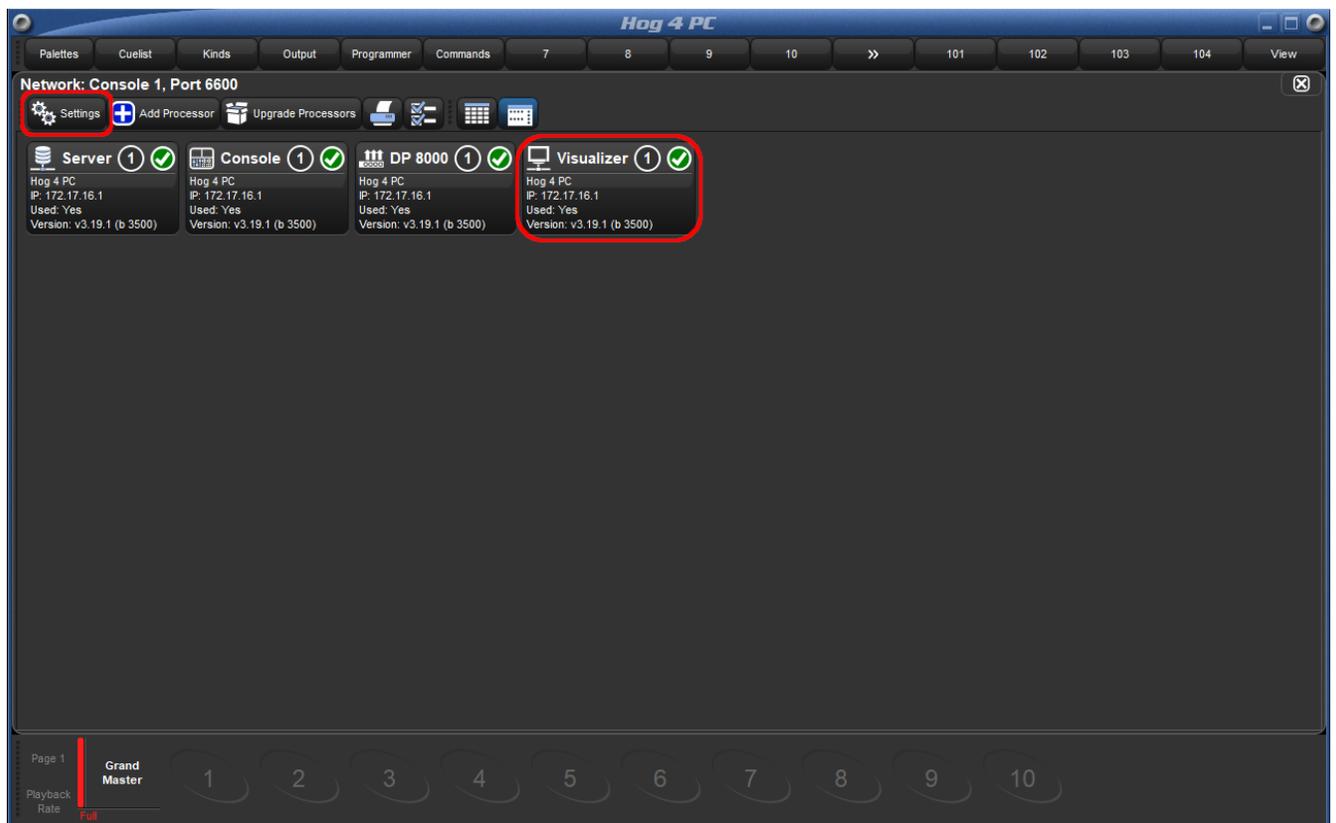

- Check the settings:

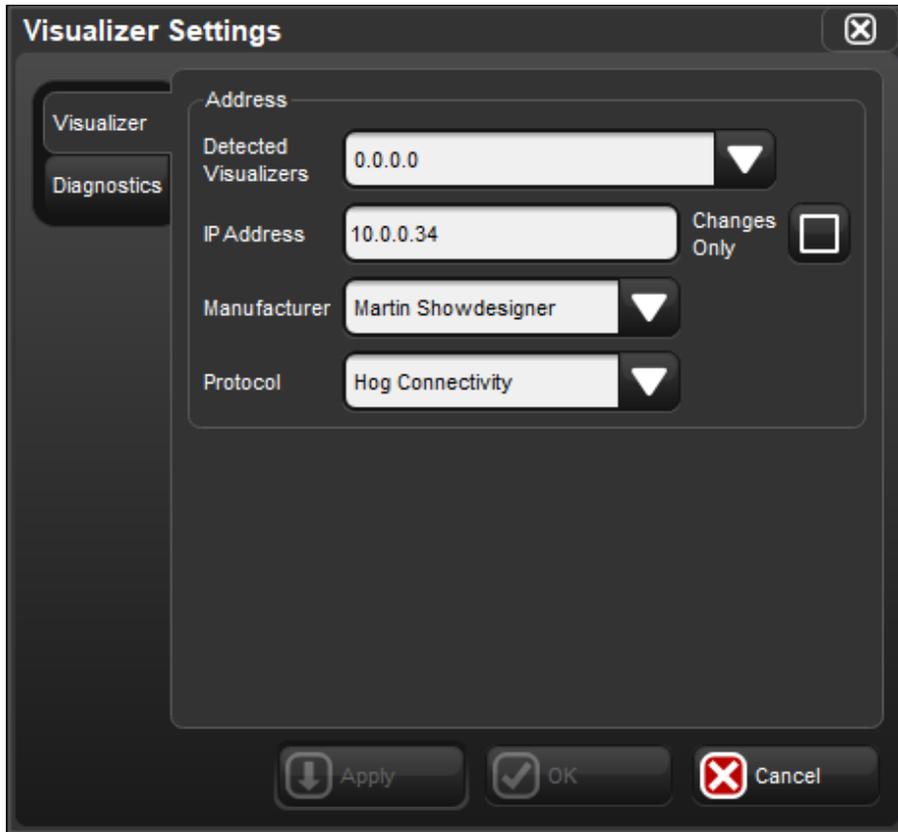

- Select the correct **IP address** of the computer that is running MSD Visualizer. If the visualizer is already running and has the HOG DMX driver selected, then it should appear in the list of found visualizers
- Select **MyShowDesigner** (Martin ShowDesigner) as Manufacturer.

Before you do the steps on the HOG, it is probably best to have the Visualizer setup to receive its DMX from HOG and have it running so it will turn up in the list on the HOG.